


## MAXIMUM COMFORT AND CONTROL IN HEATING

## TSSHC-T-1-24-50VA

Transformer 50 VA, 277 to 24 Vac, Foot and Single Threaded Hub Mount



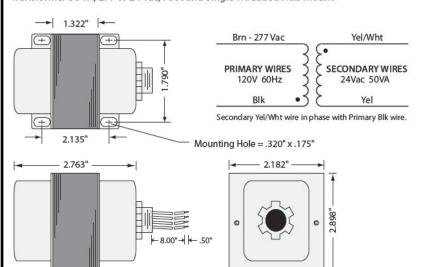

## **SPECIFICATIONS**

\_\_\_ 2.698" \_\_\_

VA Rating: 50 Frequency: 50/60 Hz

Mounting: Foot & Single Threaded Hub

Over Current Protection: 3 Amp Fuse (Fuse not field replaceable)
Dimensions: 2.763" x 2.182" x 2.898" (w/ .500" NPT Hub)

**Dimensions:** 2.763" x 2.182" x 2.898" (w/ .5 **Wire Length:** 8"Typical w/ .5" Strip

Operating Temperature: -30 to 140° F MTBF: 100,000 Hours @ 77° F

Construction: Split-Bobbin

Weight: 2.00 lbs.

Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS



