


## TSSHC-T-1/2/3/4-40VA


## MAXIMUM COMFORT AND CONTROL IN HEATING


c(UL)us

## TSSHC-T-1/2/3/4-40VA

Transformer 40 VA, 277/240/208/120 to 24 Vac, Foot and Dual Threaded Hub Mount

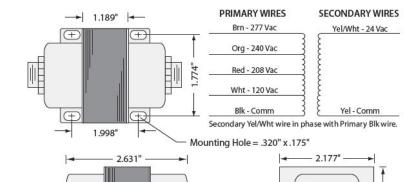

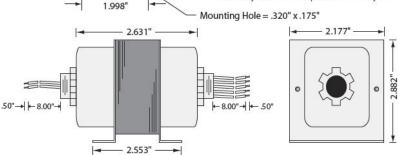



## **SPECIFICATIONS**

VA Rating: 40 Frequency: 50/60 Hz

Mounting: Foot & Dual Threaded Hubs Over Current Protection: Inherently Limited

Dimensions: 2.631" x 2.177" x 2.882" (w/.500" NPT Hubs)

**Wire Length:** 8"Typical w/ .5" Strip **Operating Temperature:** -30 to 140° F

MTBF: 100,000 Hours @ 77° F

Construction: Split-Bobbin Weight: 2.20 lbs.

Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS

PRIMARY WIRES	SECONDARY WIR
Brn - 277 Vac	Yel/Wht - 24
)rg - 240 Vac	{
Red - 208 Vac	{
Wht - 120 Vac	<u>{</u>
Blk - Comm	} } Yel - 24 Va

